


## 12.4 Miniature Type, MSC \ MSD Stainless Steel Series

### A. Construction

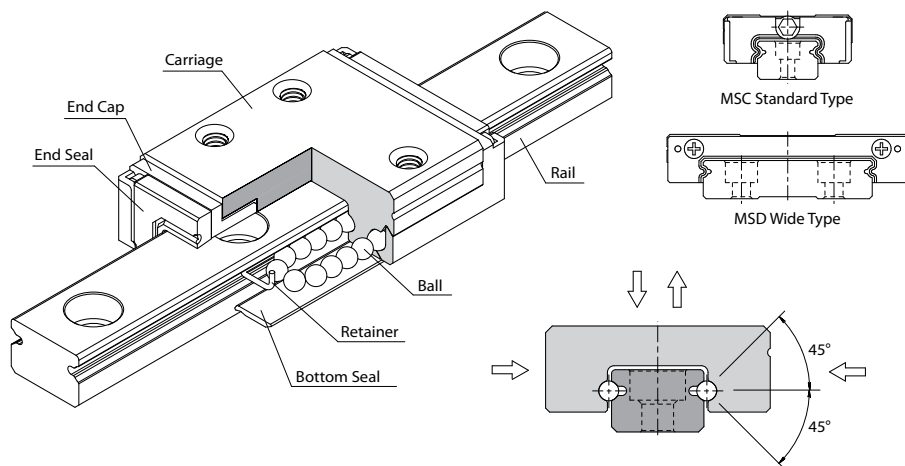

### B. Characteristics

MSC st ows with Gothic-arch groove and designed to contact angle of  $45^\circ$  which enables it to bear an equal load in radial, reversed radial and lateral directions. Furthermore, ultra compact and low friction resistance design is suit to compact equipment. The lubrication route makes the lubricant evenly distribute in each circulation loop. Therefore,the optimum lubrication can be achieved in any installation direction, and this promotes the performance in running accuracy, service life, and reliability.

### Four-way Equal Load

The two trains of balls are allocated to a Gothic-arch groove contact angle at  $45^\circ$ , thus each train of balls can take up an equal rated load in all four directions.

### Ultra Compact

The ultra compact design is suit to the compact application with limited in space.

### Ball Retainer

Design with ball retainer can prevent ball form dropping.

### Smooth Movement with Low Noise


The simplified design of circulating system with strengthened synthetic resin accessories makes the movement smooth and quiet.

### Interchangeability

For interchangeable type of linear guideway, the dimensional tolerances are strictly maintained within a reasonable range, and this has made the random matching of the same size of rails and carriages possible. Therefore, the similar preload and accuracy can be obtained even under the random matching condition. As a result of this advantage, the linear guideway can be stocked as standard parts, the installation and maintenance become more convenient. Moreover, this is also beneficial for shortening the delivery time.

## C. Description of Specification

### (1) Non-interchangeable Type

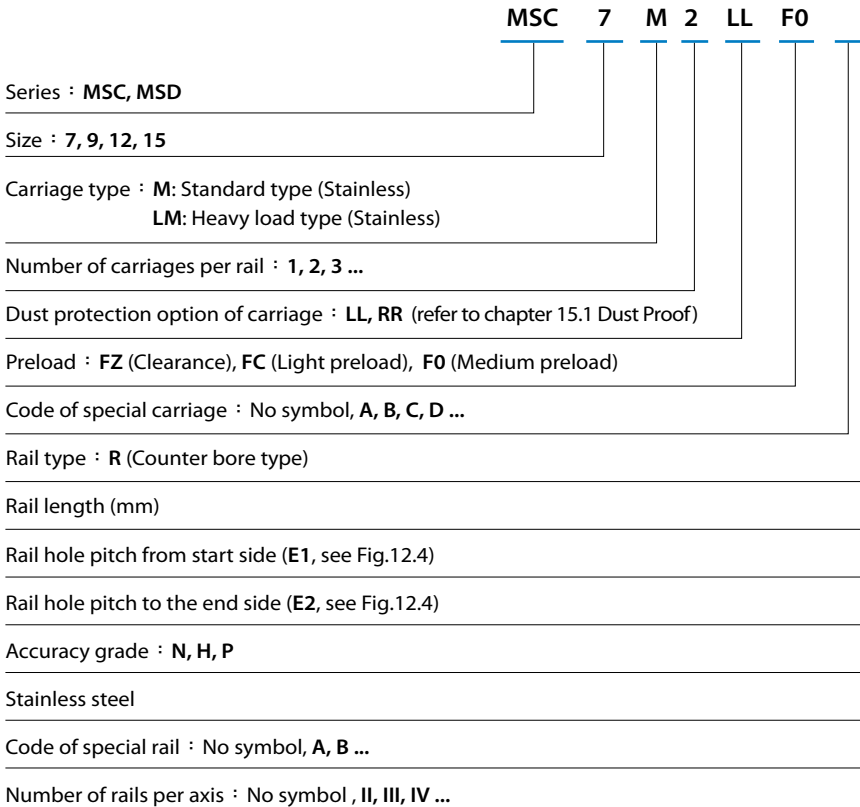



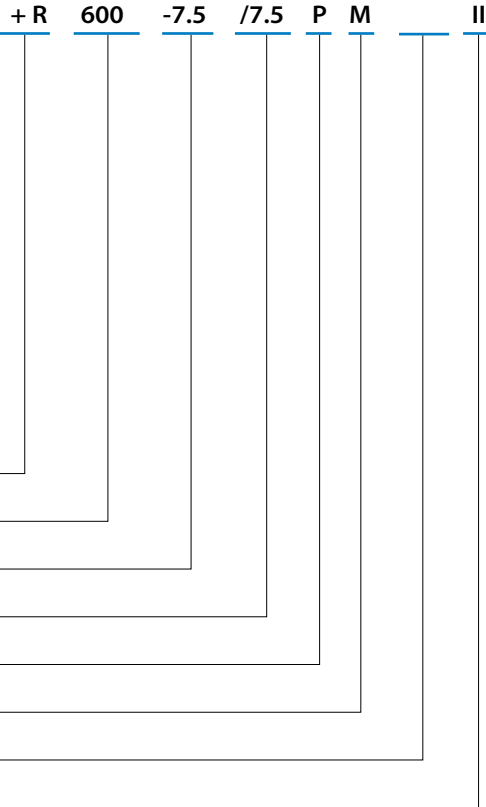


Fig 12.4

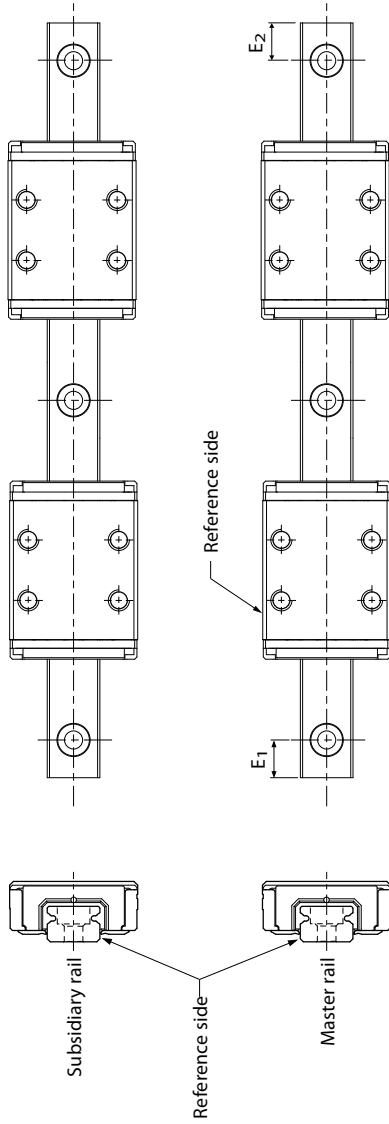


## (2) Interchangeable Type


### Code of Carriage

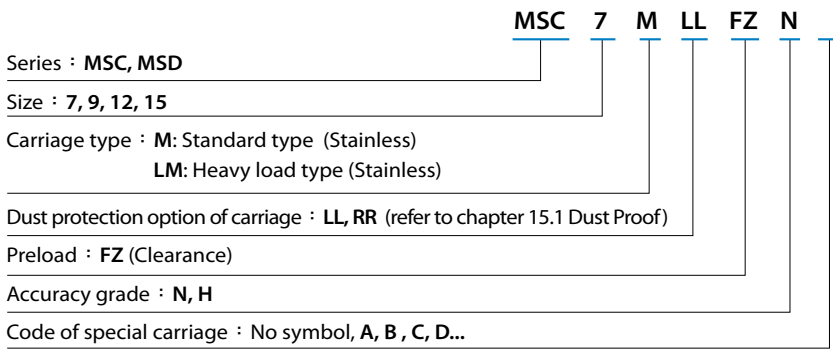

### Code of Rail

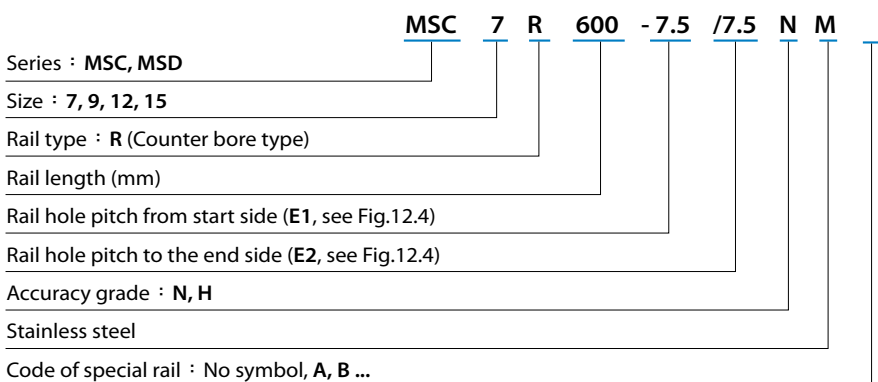

## F. Accuracy Grade

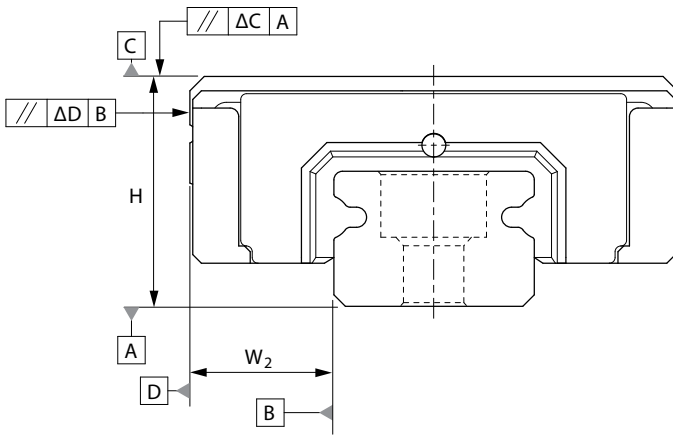

**Table 1 Running Parallelism**

| Rail length (mm) |         | Running Parallelism Values ( $\mu m$ ) |   |   |
|------------------|---------|--|---|---|
| Above            | Or less | N                                      | H | P |
| -                | 40      | 8                                      | 4 | 1 |
| 40               | 70      | 10                                     | 4 | 1 |
| 70               | 100     | 11                                     | 4 | 2 |
| 100              | 130     | 12                                     | 5 | 2 |
| 130              | 160     | 13                                     | 6 | 2 |
| 160              | 190     | 14                                     | 7 | 2 |
| 190              | 220     | 15                                     | 7 | 3 |
| 220              | 250     | 16                                     | 8 | 3 |
| 250              | 280     | 17                                     | 8 | 3 |

| Rail length (mm) |         | Running Parallelism Values( $\mu m$ ) |    |   |
|------------------|---------|---------------------------------------|----|---|
| Above            | Or less | N                                     | H  | P |
| 280              | 310     | 17                                    | 9  | 3 |
| 310              | 340     | 18                                    | 9  | 3 |
| 340              | 370     | 18                                    | 10 | 3 |
| 370              | 400     | 19                                    | 10 | 3 |
| 400              | 430     | 20                                    | 11 | 4 |
| 430              | 460     | 20                                    | 12 | 4 |
| 460              | 490     | 21                                    | 12 | 4 |
| 490              | 520     | 21                                    | 12 | 4 |
| 520              | 550     | 22                                    | 12 | 4 |
| 550              | 580     | 22                                    | 13 | 4 |
| 580              | 610     | 22                                    | 13 | 4 |
| 610              | 640     | 22                                    | 13 | 4 |
| 640              | 670     | 23                                    | 13 | 4 |
| 670              | 700     | 23                                    | 13 | 5 |
| 700              | 730     | 23                                    | 14 | 5 |
| 730              | 760     | 23                                    | 14 | 5 |
| 760              | 790     | 23                                    | 14 | 5 |
| 790              | 820     | 23                                    | 14 | 5 |
| 820              | 850     | 24                                    | 14 | 5 |
| 850              | 880     | 24                                    | 15 | 5 |
| 880              | 910     | 24                                    | 15 | 5 |
| 910              | 940     | 24                                    | 15 | 5 |
| 940              | 970     | 24                                    | 15 | 5 |
| 970              | 1000    | 25                                    | 16 | 5 |



## A Non-Interchangeable Type

| Model No.          | Item  | Accuracy Grade               |             |             |
|--------------------|---|------------------------------|-------------|-------------|
|                    |   | Normal N                     | High H      | Precision P |
| 7<br>9<br>12<br>15 | Tolerance for height H                          | $\pm 0.04$                   | $\pm 0.02$  | $\pm 0.01$  |
|                    | Height difference $\Delta H$                    | 0.03                         | 0.015       | 0.007       |
|                    | Tolerance for distance $W_2$                    | $\pm 0.04$                   | $\pm 0.025$ | $\pm 0.015$ |
|                    | Difference in distance $W_2(\Delta W_2)$        | 0.03                         | 0.02        | 0.01        |
|                    | Running parallelism of surface C with surface A | $\Delta C$ (see the table 1) |             |             |
|                    | Running parallelism of surface D with surface B | $\Delta D$ (see the table 1) |             |             |

## B Interchangeable Type

| Model No.          | Item  |  | Accuracy Grade               |        |
|--------------------|---|--|------------------------------|--------|
|                    |   |  | Normal N                     | High H |
| 7<br>9<br>12<br>15 | Tolerance for height H                                |  | ±0.04                        | ±0.02  |
|                    | Tolerance for distance $W_2$                          |  | ±0.04                        | ±0.025 |
|                    | Paired single-rail                                    | Height difference ( $\Delta H$ )         | 0.03                         | 0.015  |
|                    |   | Difference in distance $W_2(\Delta W_2)$ | 0.03                         | 0.02   |
|                    | Paired multiple-rail height difference ( $\Delta H$ ) |  | 0.07                         | 0.04   |
|                    | Running parallelism of surface C with surface A       |  | $\Delta C$ (see the table 1) |        |
|                    | Running parallelism of surface D with surface B       |  | $\Delta D$ (see the table 1) |        |

## G. Preload Grade


| Series | Preload grade          |                    |                     |
|--------|------------------------|--------------------|---------------------|
|        | Clearance (FZ)         | Light preload (FC) | Medium preload (F0) |
| MSC7   | Clearance 4~10 $\mu$ m | 0                  | 0.01~0.02C          |
| MSC9   |                        |                    |                     |
| MSC12  |                        |                    |                     |
| MSC15  |                        |                    |                     |
| MSC7L  | Clearance 4~10 $\mu$ m | 0                  | 0.01~0.02C          |
| MSC9L  |                        |                    |                     |
| MSC12L |                        |                    |                     |
| MSC15L |                        |                    |                     |
| MSD7   | Clearance 4~10 $\mu$ m | 0                  | 0.01~0.02C          |
| MSD9   |                        |                    |                     |
| MSD12  |                        |                    |                     |
| MSD15  |                        |                    |                     |
| MSD7L  | Clearance 4~10 $\mu$ m | 0                  | 0.01~0.02C          |
| MSD9L  |                        |                    |                     |
| MSD12L |                        |                    |                     |
| MSD15L |                        |                    |                     |

Note: C is basic dynamic load rating in above table. Refer to the specification of products, please.

## H. The Shoulder Height and Corner Radius for Installation

### MSC series


Unit: mm

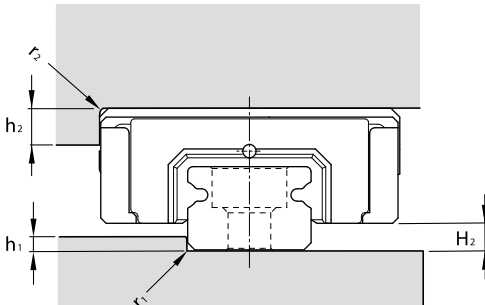

| Model No. | $r_1$ (max.) | $r_2$ (max.) | $h_1$ | $h_2$ | $H_2$ |
|-----------|--------------|--------------|-------|-------|-------|
| 7         | 0.2          | 0.2          | 1.0   | 3     | 1.5   |
| 9         | 0.2          | 0.3          | 1.7   | 3     | 2.2   |
| 12        | 0.3          | 0.4          | 2.5   | 4     | 3     |
| 15        | 0.5          | 0.5          | 3.5   | 5     | 4     |

MSD series

Unit: mm

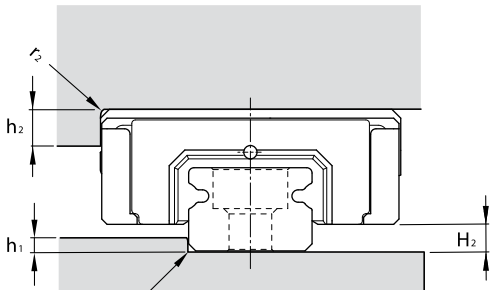


| Model No. | $r_1$ (max.) | $r_2$ (max.) | $h_1$ | $h_2$ | $H_2$ |
|-----------|--------------|--------------|-------|-------|-------|
| 7         | 0.2          | 0.2          | 1.5   | 3     | 2     |
| 9         | 0.2          | 0.3          | 3.2   | 3     | 3.7   |
| 12        | 0.3          | 0.4          | 3.5   | 4     | 4     |
| 15        | 0.5          | 0.5          | 3.5   | 5     | 4     |

I. Dimensional Tolerance of Mounting Surface

MSC、MSD Series

The tolerances of parallelism between two axes are shown as below.


The parallel deviation between two axes ( $e_1$ )

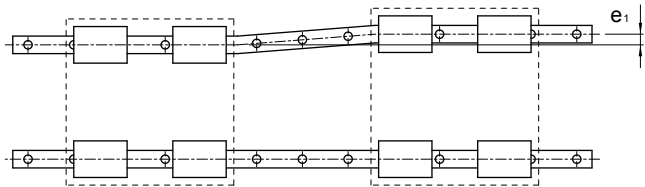

Unit:  $\mu m$

| Model No.    | Preload Grade |    |    |
|--------------|---------------|----|----|
|              | FZ            | FC | F0 |
| MSC 7 MSD7   | 12            | 3  | 3  |
| MSC 9 MSD9   | 15            | 4  | 3  |
| MSC 12 MSD12 | 20            | 9  | 5  |
| MSC 15 MSD15 | 25            | 10 | 6  |

### Level difference between two axes ( $e_2$ )

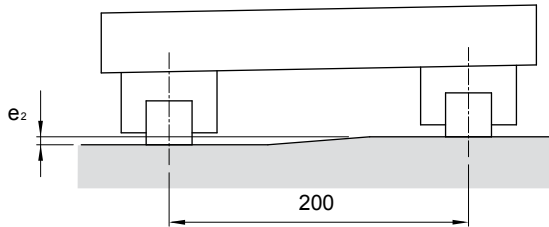


Unit:  $\mu m$

| Model No.    | Preload Grade |    |    |
|--------------|---------------|----|----|
|              | FZ            | FC | F0 |
| MSC 7 MSD7   | 25            | 25 | 6  |
| MSC 9 MSD9   | 35            | 35 | 6  |
| MSC 12 MSD12 | 50            | 50 | 12 |
| MSC 15 MSD15 | 60            | 60 | 20 |

Note: The permissible values in table are applicable when the span is 200mm wide.

## J. Rail Maximum Length and Standrad

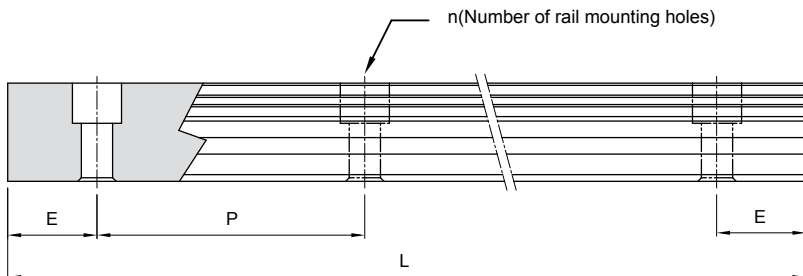

$$L = (n - 1) \times P + 2 \times E$$

$L$ : Total Length of rail (mm)

$n$ : Nuber of mounting holes


$P$ : Distance between any two holes (mm)

$E$ : Distance from the center of the last hole to the edge (mm)

Unit:  $\mu\text{m}$

| Model No. |    | Standard Pitch (P) | Standard ( $E_{\text{std.}}$ ) | Standard (maximum) ( $L_0 \text{ max.}$ ) |
|-----------|----|--------------------|--------------------------------|---|
| MSC       | 7  | 15                 | 5                              | 1000                                      |
|           | 9  | 20                 | 7.5                            | 1000 (2000)                               |
|           | 12 | 25                 | 10                             | 1000 (2000)                               |
|           | 15 | 40                 | 15                             | 1000 (2000)                               |
| MSD       | 7  | 30                 | 10                             | 1000 (2000)                               |
|           | 9  | 30                 | 10                             | 1000 (2000)                               |
|           | 12 | 40                 | 15                             | 1000 (2000)                               |
|           | 15 | 40                 | 15                             | 1000 (2000)                               |

# Dimensions of MSC-M / MSC-LM


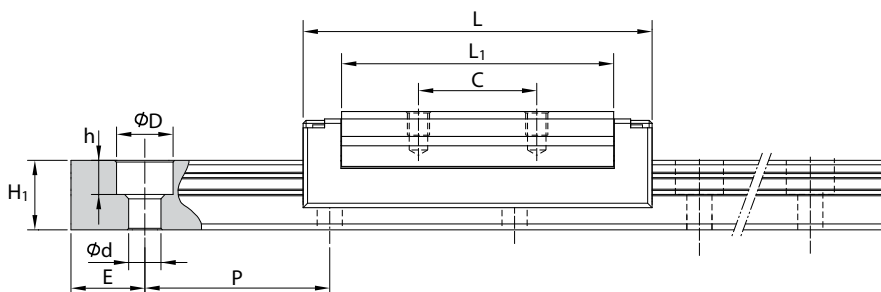


Unit: mm

| Model No.             | External dimension |            |              |       |       | Carriage dimension |          |                 |              |     |      |
|-----------------------|--------------------|------------|--------------|-------|-------|--------------------|----------|-----------------|--------------|-----|------|
|                       | Height<br>H        | Width<br>W | Length<br>L  | $W_2$ | $H_2$ | B                  | C        | $S \times \ell$ | $L_1$        | T   | G    |
| MSC 7 M<br>MSC 7 LM   | 8                  | 17         | 23.6<br>33.1 | 5     | 1.5   | 12                 | 8<br>13  | M2×2.5          | 18.4<br>27.9 | 3.5 | Ø0.8 |
| MSC 9 M<br>MSC 9 LM   | 10                 | 20         | 31.1<br>41.3 | 5.5   | 2.2   | 15                 | 10<br>16 | M3×3            | 25.8<br>36   | 4.5 | Ø1   |
| MSC 12 M<br>MSC 12 LM | 13                 | 27         | 34.6<br>47.6 | 7.5   | 3     | 20                 | 15<br>20 | M3×3.6          | 28<br>41     | 6   | Ø1.5 |
| MSC 15 M<br>MSC 15 LM | 16                 | 32         | 43.5<br>60.5 | 8.5   | 4     | 25                 | 20<br>25 | M3×4.2          | 36.1<br>53.1 | 7   | G-M3 |

Note: The basic dynamic load rating C of ball type is based on the 50 km for nominal life. The conversion between C for 50 km and  $C_{100}$  for 100 km is  $C=1.26 \times C_{100}$ .

Note\*: Single: Single carriage/ Double: Double carriages closely contacting with each other.

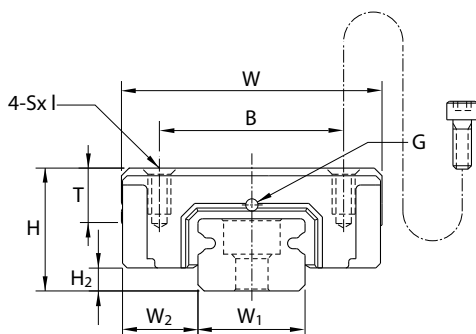


Unit: mm

| Model No. | Rail dimension          |                          |            |           |             | Basic load rating  |                                | Static moment rating  |         |                       |         |                       | Weight         |              |
|-----------|-------------------------|--------------------------|------------|-----------|-------------|--------------------|--------------------------------|-----------------------|---------|-----------------------|---------|-----------------------|----------------|--------------|
|           | Width<br>W <sub>1</sub> | Height<br>H <sub>1</sub> | Pitch<br>P | E<br>std. | D × h × d   | Dynamic<br>C<br>kN | Static<br>C <sub>0</sub><br>kN | M <sub>p</sub><br>N-m |         | M <sub>y</sub><br>N-m |         | M <sub>r</sub><br>N-m | Carriage<br>kg | Rail<br>kg/m |
|           |                         |                          |            |           |             |                    |                                | Single*               | Double* | Single*               | Double* |                       |                |              |
| MSC 7 M   | 7 <sup>0</sup>          | 4.7                      | 15         | 5         | 4.2×2.3×2.4 | 0.94               | 1.28                           | 2.6                   | 15.33   | 2.6                   | 15.33   | 4.7                   | 13             | 0.22         |
| MSC 7 LM  | -0.05                   |                          |            |           |             | 1.36               | 2.24                           | 7.4                   | 37.92   | 7.4                   | 37.92   | 8.3                   | 18             |              |
| MSC 9 M   | 9 <sup>0</sup>          | 5.5                      | 20         | 7.5       | 6×3.3×3.5   | 1.71               | 2.24                           | 6.1                   | 33.46   | 6.1                   | 33.46   | 10.8                  | 29             | 0.33         |
| MSC 9 LM  | -0.05                   |                          |            |           |             | 2.52               | 3.92                           | 17.4                  | 84.63   | 17.4                  | 84.63   | 18.8                  | 39             |              |
| MSC 12 M  | 12 <sup>0</sup>         | 7.5                      | 25         | 10        | 6×4.5×3.5   | 2.62               | 3.52                           | 11.4                  | 63.96   | 11.4                  | 63.96   | 22.2                  | 40             | 0.63         |
| MSC 12 LM | -0.05                   |                          |            |           |             | 3.77               | 5.72                           | 28.3                  | 141.52  | 28.3                  | 141.52  | 36.0                  | 60             |              |
| MSC 15 M  | 15 <sup>0</sup>         | 9.5                      | 40         | 15        | 6×4.5×3.5   | 4.52               | 5.70                           | 24.7                  | 132.17  | 24.7                  | 132.17  | 44.4                  | 71             | 1.02         |
| MSC 15 LM | -0.05                   |                          |            |           |             | 6.47               | 9.26                           | 61.0                  | 295.87  | 61.0                  | 295.87  | 72.2                  | 100            |              |



# Dimensions of MSD-M / MSD-LM


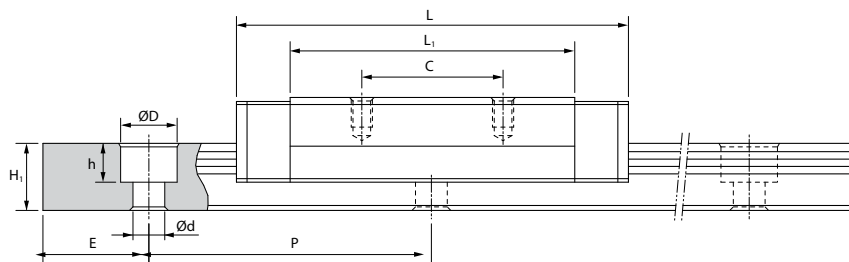


Unit: mm

| Model No.             | External dimension |            |              |                |                | Carriage dimension |          |        |                |     |      |
|-----------------------|--------------------|------------|--------------|----------------|----------------|--------------------|----------|--------|----------------|-----|------|
|                       | Height<br>H        | Width<br>W | Length<br>L  | W <sub>2</sub> | H <sub>2</sub> | B                  | C        | S × ℓ  | L <sub>1</sub> | T   | G    |
| MSD 7 M<br>MSD 7 LM   | 9                  | 25         | 30.8<br>40.5 | 5.5            | 2              | 19                 | 10<br>19 | M3×3   | 20.6<br>30.3   | 3.9 | Ø1.5 |
| MSD 9 M<br>MSD 9 LM   | 12                 | 30         | 38.7<br>50.7 | 6              | 3.7            | 21<br>23           | 12<br>24 | M3×3   | 27.1<br>39.1   | 5   | Ø1.5 |
| MSD 12 M<br>MSD 12 LM | 14                 | 40         | 44.5<br>60   | 8              | 4              | 28                 | 15<br>28 | M3×4   | 31.0<br>46.5   | 6   | Ø1.5 |
| MSD 15 M<br>MSD 15 LM | 16                 | 60         | 55.5<br>74.5 | 9              | 4              | 45                 | 20<br>35 | M4×4.5 | 40.3<br>59.3   | 7   | Ø1.5 |

Note: The basic dynamic load rating C of ball type is based on the 50 km for nominal life. The conversion between C for 50 km and C<sub>100</sub> for 100 km is C = 1.26 × C<sub>100</sub>.

Note\*: Single: Single carriage/ Double: Double carriages closely contacting with each other.

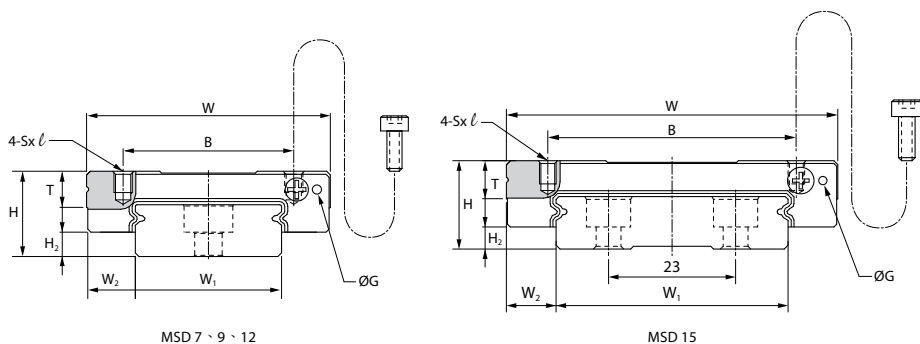

MSD 7 · 9 · 12

MSD 15

Unit: mm

| Model No. | Rail dimension          |                          |            |           |           | Basic load rating  |                                | Static moment rating  |         |                       |         |                       | Weight         |              |
|-----------|-------------------------|--------------------------|------------|-----------|-----------|--------------------|--------------------------------|-----------------------|---------|-----------------------|---------|-----------------------|----------------|--------------|
|           | Width<br>W <sub>1</sub> | Height<br>H <sub>1</sub> | Pitch<br>P | E<br>std. | D × h × d | Dynamic<br>C<br>kN | Static<br>C <sub>0</sub><br>kN | M <sub>b</sub><br>N-m |         | M <sub>y</sub><br>N-m |         | M <sub>r</sub><br>N-m | Carriage<br>kg | Rail<br>kg/m |
|           |                         |                          |            |           |           |                    |                                | Single                | Double* | Single                | Double* |                       |                |              |
| MSD 7 M   | 14 <sup>0</sup>         | 5.2                      | 30         | 10        | 6×3.2×3.5 | 1.51               | 2.46                           | 6.6                   | 39.0    | 6.6                   | 39.0    | 17.7                  | 23             | 0.55         |
| MSD 7 LM  | -0.05                   |                          |            |           |           |                    |                                | 17.5                  | 84.0    | 17.5                  | 84.0    |                       |                |              |
| MSD 9 M   | 18 <sup>0</sup>         | 7                        | 30         | 10        | 6×4.5×3.5 | 2.79               | 4.37                           | 15.6                  | 90.3    | 15.6                  | 90.3    | 40.7                  | 41             | 0.96         |
| MSD 9 LM  | -0.05                   |                          |            |           |           |                    |                                | 33.8                  | 175.2   | 33.8                  | 175.2   |                       |                |              |
| MSD 12 M  | 24 <sup>0</sup>         | 8.5                      | 40         | 15        | 8×4.5×4.5 | 4.05               | 6.20                           | 26.3                  | 151.5   | 26.3                  | 151.5   | 76.3                  | 70             | 1.55         |
| MSD 12 LM | -0.05                   |                          |            |           |           |                    |                                | 57.0                  | 294.4   | 57.0                  | 294.4   |                       |                |              |
| MSD 15 M  | 42 <sup>0</sup>         | 9.5                      | 40         | 15        | 8×4.5×4.5 | 7.08               | 10.18                          | 62.5                  | 301.4   | 62.5                  | 301.4   | 216.9                 | 150            | 2.99         |
| MSD 15 LM | -0.05                   |                          |            |           |           |                    |                                | 152.6                 | 616.1   | 135.2                 | 616.1   |                       |                |              |